

4 TONNE DOUBLE SCISSOR ALIGNMENT LIFT WITH BELLY 3 PHASE

The Double Scissor Lift is ideal for easily and conveniently lifting all wheels off the runway for brake, tyre, suspension and two or four wheel alignment work.

Item no. LT40DSA



The double scissor lift is made stronger, more versatile, and easier to use.

 **FAST
INSTALLATION**

LT40DSA

STEINER™

4 TONNE DOUBLE SCISSOR LIFT

Item no. LT40DSA

FEATURES


- › Synchronization cylinders system equipped with hose burst valves.
- › 24V control system with photocells device.
- › The safety stop device at the height of 300mm, both control buttons are needed to lower down the lift from 300mm to ground with tone alarm for safety.
- › Skid proof diamond runways and adjustable turnplate blocks.
- › Self-lubricating UHMW polyethylene sliders and bronze bush.
- › Optional Steiner 2.8 Ton rolling jack available



Photocell configuration for the leveling of the two platforms, more stable and safe.




Secondary scissor lift controlled with ease by remote control.




Optional extension kits to extend platform with extra 300mm. Kit No.:PX002.



Oil-water separator and solenoid air valve are installed on the control cabinet.



Extendable varying platform suitable for varying wheelbases.



Adjustable turnplates positions, suit for all kinds of vehicles.





Rear-slip ball sets. Optional 24V LED light. LED Kit No. LT0004



Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump. Kit No. LT0002

SPECIFICATIONS

Style	Alignment
Lifting capacity	4000kg
Lifting time	54 S
Lifting Height	A1 1870mm
Minimum Height	A2 280mm
Runway Length	B 4800mm
Overall Width	C 2190mm
Runway Width	D 625mm
Overall Length (Inc. Ramps)	E 6336mm
Secondary Scissor Length	F 1600-1934mm
Secondary Scissor Lifting Height	G 420mm
Secondary Scissor Lifting Capacity	4000kg
Motor	4.0HP
Gross Weight	2448kg

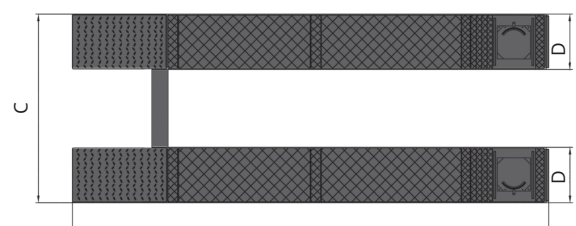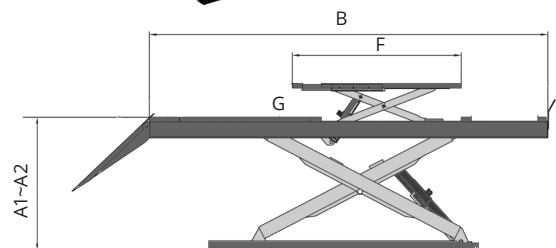

STEINER™