

# Lifting equipment

## Bottle Jacks

Versatile for use in a large variety of applications: pushing, bending, pressing or straightening. The full range comes with cast iron bases, polished main rams and a solid, chromed pump linkage. These jacks are tested to the latest European standards, have overload protection and can be used in both horizontal and vertical positions. All models (except Y413000 & Y411000) have a twist top for precise height adjustments. The **telescopic** Y411000 comes with two extensions (45mm+6mm). Winntec® guarantees a 3 years warranty due to internally machined oil passages, smooth bearing surfaces and close tolerances.



**Y411000**  
Telescopic model 10T



Y410200



Y410400



Y410600



Y410800



Y411200



Y411500



Y412000



Y412001




Y413000



*Twist top  
allows fine  
tuning*

## Main features

- Chromed pistons
- Easy maintenance
- Heat-treated saddle




## Jack dimensions

Model	Base plate (mm)	Min H. (mm)	Lifting H. (mm)	Adjust H. (mm)	Max H. (mm)		
Y410200	96x93	158	90	60	308	2 T	2,3
Y410400	112x104	180	110	60	350	4 T	3,3
Y410600	116x116	197	125	60	382	6 T	4,4
Y410800	120x120	205	125	60	390	8 T	5,4
Y411000	180x118	120	100	-	260	10 T	6,4
Y411200	140x135	214	125	60	399	12 T	7,2
Y411500	140x140	225	140	60	425	16 T	8,3
Y412000	155x140	244	145	60	449	20 T	10,5
Y412001	155x140	190	90	60	340	20 T	9
Y413000	175x160	285	180	-	465	30 T	14,6

# Air Bottle Jacks

Premium quality 20T air & air/manual bottle jacks. These models feature a aluminum air motor, specially heat treated cylinder walls and chrome pistons ensuring premium performance, durability, life and safety. Filters prevent contaminants from entering the air/hydraulic system. **Y432003** can be stored vertically. **Y432021** offers no manually operated pump.

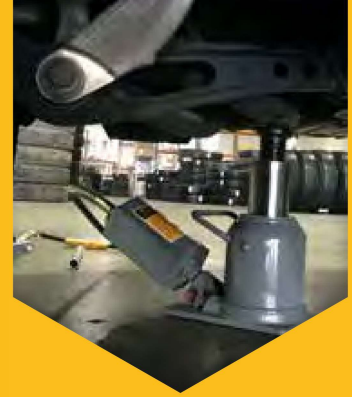

Low profile



Y432021

## Main features

- Welded base
- Extension screw
- High speed air motor
- Chromed ram




Y432020

Best in class



Y432003

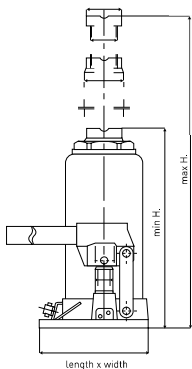

## Jack dimensions

Model	Base plate (mm)	Min H. (mm)	Lifting H. (mm)	Adjust H. (mm)	Max H. (mm)		
Y432021	180x115	148	66.6	45	260	20 T	9
Y432020	220x175	245	150	80	475	20 T	16.5
Y432003	300x150	253	150	80	483	20 T	25.7